

FR2000 Desktop RFID (UHF) Reader

User Manual



Statement

© 2023 Urovo Technology, Co., L. All rights reserved.

Without written permission from Urovo, no part of this publication may be reproduced or used in any form or by any electronic or mechanical means. This includes electronic or mechanical methods such as photocopying, recording, or information storage and retrieval systems. Information in this manual is subject to change without notice.

The software is provided strictly 'as is.' All software, including firmware, provided to the user is licensed. Urovo grants the user a non-transferable and non-exclusive license to use each software or firmware program delivered under this agreement (the License Program). Except as expressly provided below, the user may not transfer, sublicense, or otherwise transfer this license without the prior written consent of Urovo. Unless permitted by copyright law, the user has no right to copy all or part of the licensed program. Without written permission from Urovo, the user may not modify, merge any form or part of the licensed program, or combine it with other program materials, create derivative works from the licensed program, or use the licensed program on a network.

The user agrees to retain Urovo's copyright notice on the authorized program delivered under this agreement and include the same copyright notice in full or in part in any authorized copies made by them. The user agrees not to decompile, disassemble, decode, or reverse engineer any licensed program or any part thereof delivered to the user. Urovo reserves the right to modify any software or product to improve reliability, functionality, or design. Urovo assumes no responsibility for any product liability arising from or related to the use or application of any product, circuit, or application described herein. No license, whether express or implied, estoppel, or otherwise, is granted to any Urovo technology intellectual property. Implied licenses apply only to devices, circuits, and subsystems included in Urovo products. Other product names mentioned in this manual may be trademarks or registered trademarks of their respective companies, and are hereby acknowledged.

index

FR2000 Desktop RFID (UHF) Reader	1
Statement.....	1
index.....	2
Chapter 1. Appearance	3
Chapter 2. Indicator Light Explanation	6
Chapter 3. Get Started	7
3.1 Connection	7
3.2 Connection and Power Supply	7
3.2.1 To Windows.....	8
3.2.1.1 Install the Driver	8
3.2.1.2 Connect	9
3.2.2 To Android	10
3.2.2.1 Search the BT of the device.....	10
3.2.2.2 Open the APP and Demonstration	11
Chapter 4. Setup.....	13
4.1 Baud rate	13
4.2 Output power (0~27dBm)	14
4.3 Protocol	14
4.4 Region.....	14
4.5 Buzzer	14
4.6 Temperature	15
Chapter 5. RFID Tag Read and Write Operations	16
Chapter 6. RFID Tag Lock and Kill	17
Chapter 7. Environmental	18
Chapter 8. Safety Precautions	19
Chapter 9. Develop option	20
Chapter 10. Troubleshooting.....	21
Appendix 1	22

Chapter 1. Appearance

FR2000 is a state-of-the-art desktop UHF reader developed by Urovo Technology. This reader is versatile, supporting applications on Windows, Android, and iOS platforms. With its cutting-edge E710 RFID chip and proprietary high-efficiency signal processing algorithms, FR2000 excels in read-write capabilities across a broad reading range. Its exceptional performance allows for the precise reading of RFID tags from all directions, achieving an impressive accuracy rate of up to 99.9%.

Designed for various applications, FR2000 is ideal for retail collection, logistics, identity verification, access control, anti-counterfeiting systems, and production process control. Its adaptability and accuracy make it a reliable choice for businesses across diverse industries.







Chapter 2. Indicator Light Explanation

The indicator lights on the device display different statuses, including power on, communication status, etc.




Chapter 3. Get Started

3.1 Connection

Real-time communication, interconnection

Support Type-C USB 2.0, Bluetooth BT5.0, RJ45 network port and other communication methods can be interconnected with Windows, Android, iOS and other devices with different operating systems to meet the needs of different operational scenarios.

3.2 Connection and Power Supply

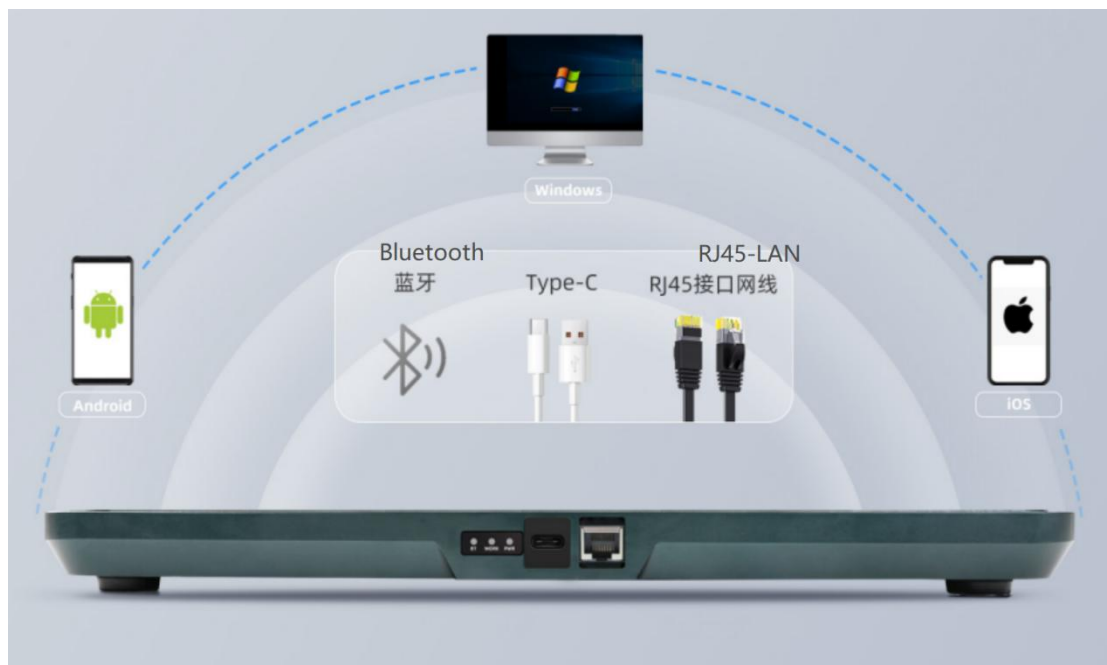


Support USB power supply, optional PoE power supply mode, a USB Type-C cable or RJ45 interface cable can complete the data transmission and power supply operations, effectively reducing deployment and maintenance costs




3.2.1 To Windows

3.2.1.1 Install the Driver


If you are using USB for data communication, install the USB driver first,

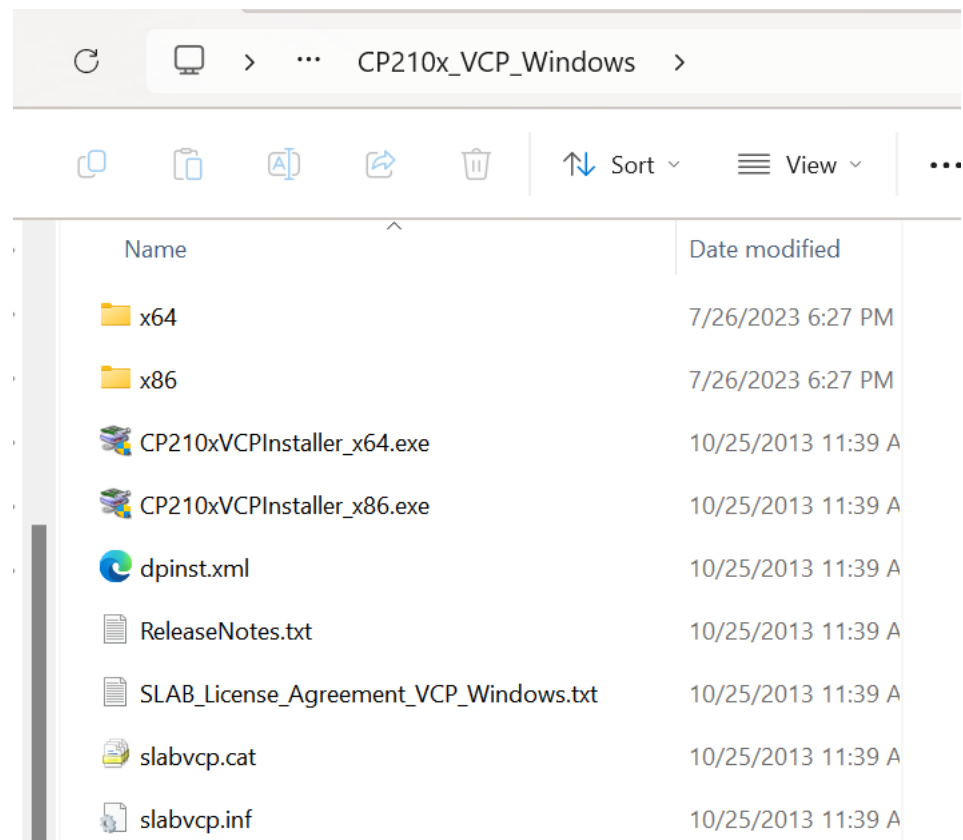

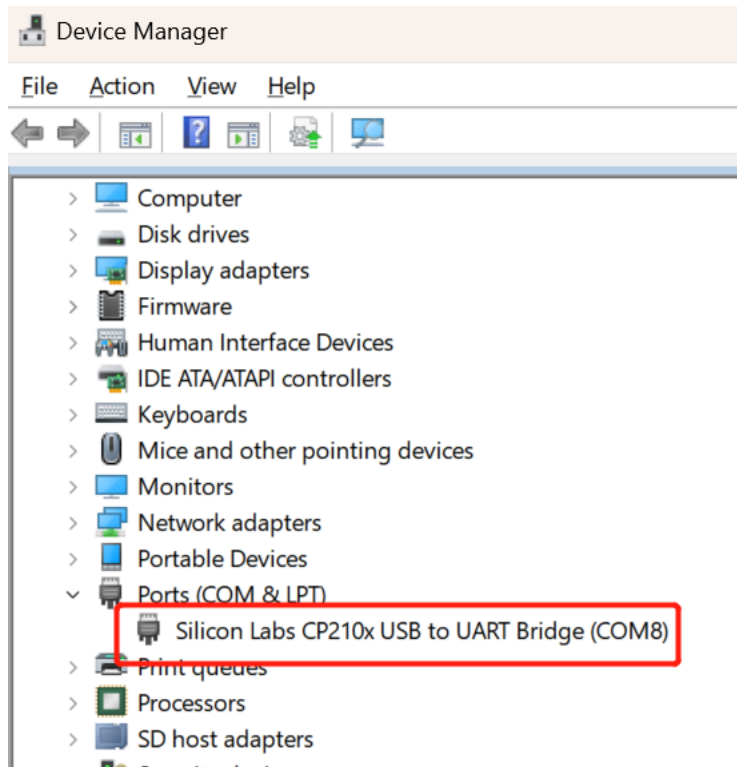


3.2.1.2 Connect

Open the “UHF Reader Pad\Demo\Demo\c#\EXE\UHFReader288Demo.exe” or some other demo
 Select the com port shown in your device manager

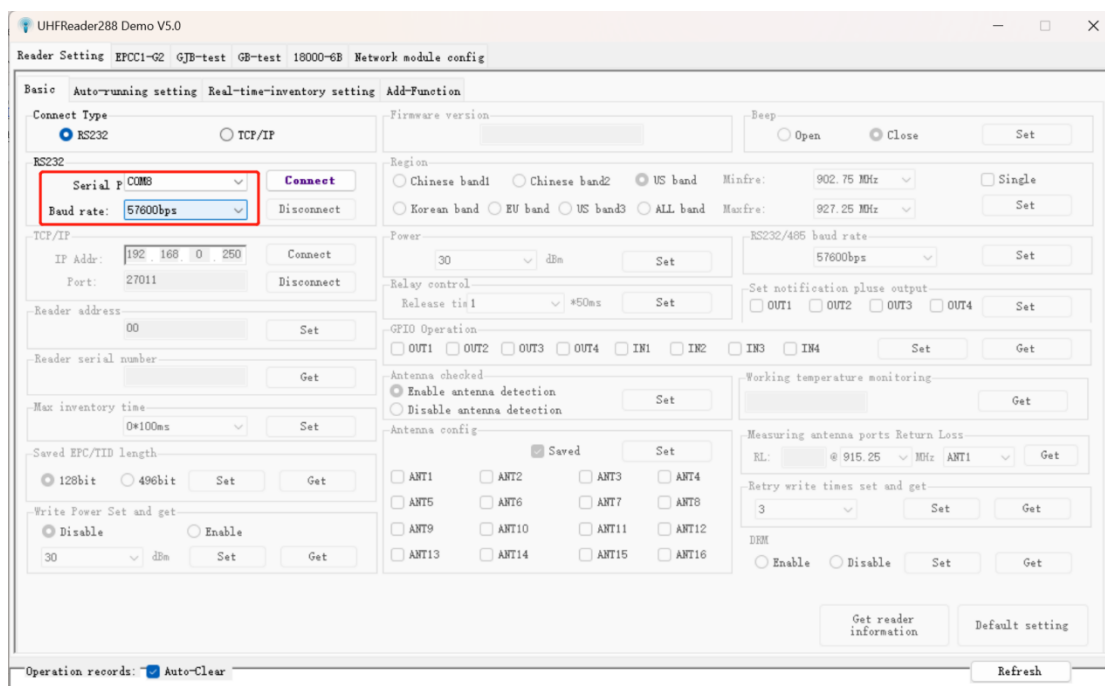


If the device have RJ45-LAN port, you can use the IP to connect the device

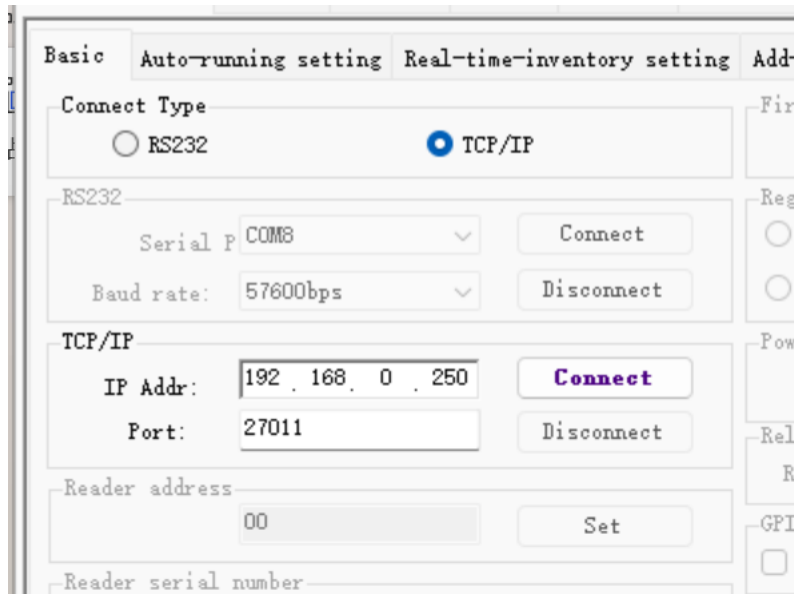


3.2.2 To Android

3.2.2.1 Search the BT of the device

You can find the name in the bottom label, or you can read it in the [UHFReader288Demo.exe](#),
And pair to the desktop RFID bluetooth with PIN : 1234

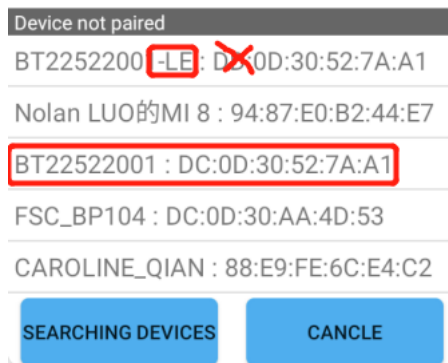


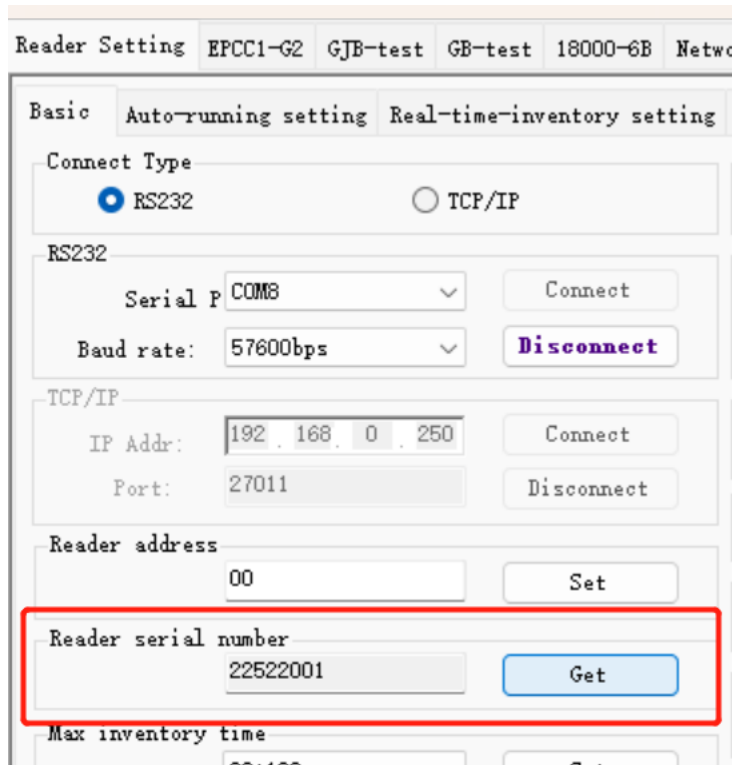

3.2.2.2 Open the APP and Demonstration

3.2.2.2.1 Connect to RFID device.

Open-connect Bluetooth, then the firmware version will be shown:

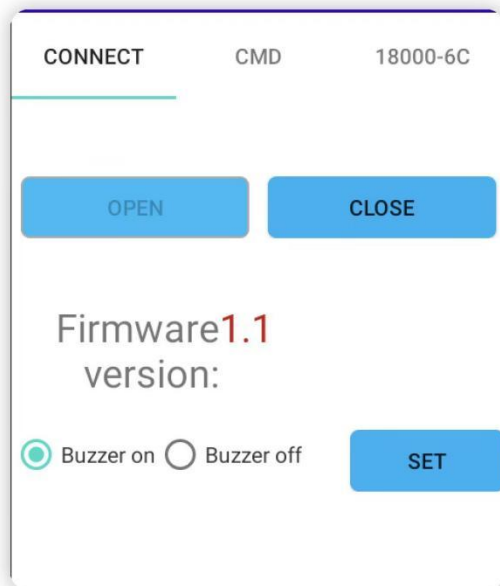


Buzzer on/off option

3.2.2.2.2 Setting page

The screenshot shows a mobile application interface with three tabs: 'CONNECT', 'CMD', and '18000-6C'. The 'CMD' tab is selected and underlined. Below the tabs, there are four dropdown menus for configuration: 'Frequency band' set to 'Chinese band2', 'Minimum frequency' set to '902.75MHz', 'Maximum frequency' set to '927.25MHz', and 'Power' set to '30'. At the bottom, there are three checkboxes for 'Antenna1', 'Antenna2', and 'Antenna3', all of which are currently unchecked. Below the checkboxes are two blue buttons labeled 'READ' and 'SET'.


Power(0-27dBm), only one Antenna.

3.2.2.2.3 Reading tags

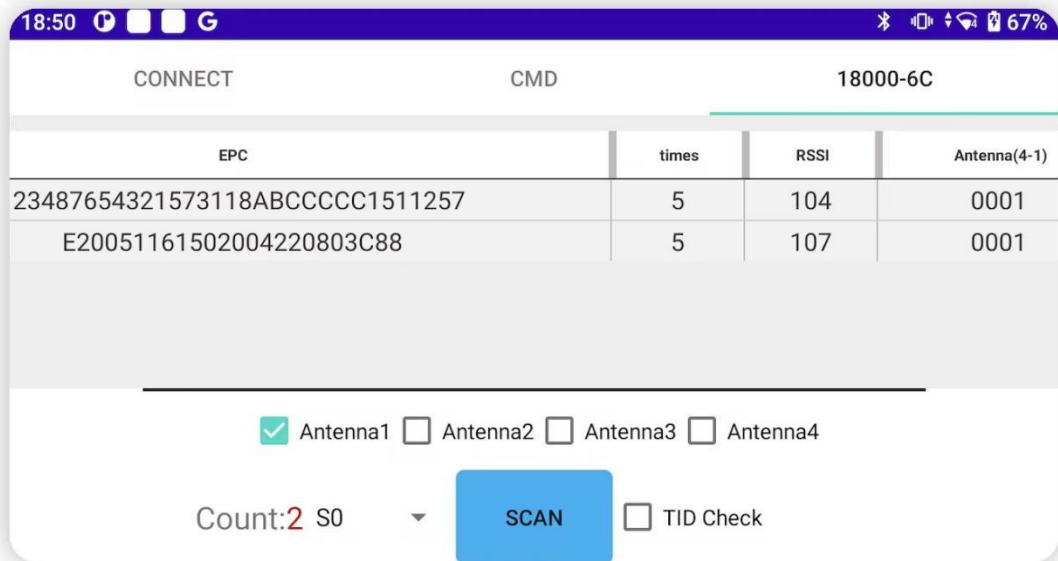


Chapter 4. Setup

4.1 Baud rate

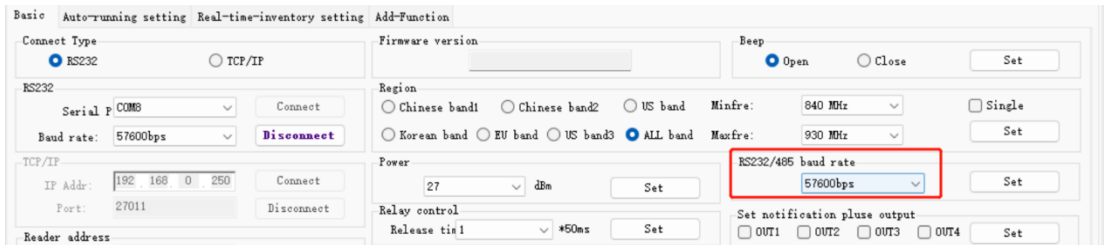


4.2 Output power (0~27dBm)

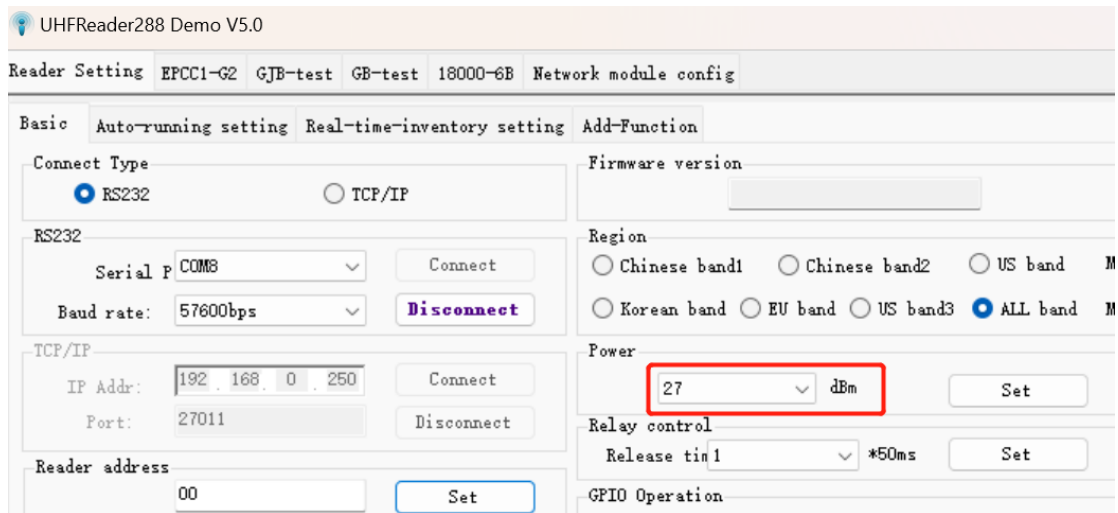


4.3 Protocol

Only support ISO18000-6C

4.4 Region

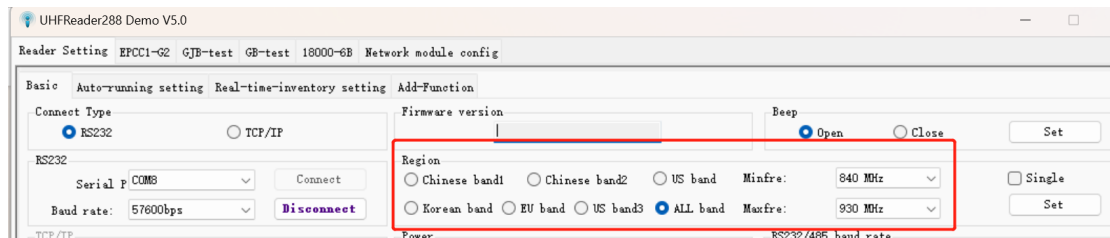

4.5 Buzzer

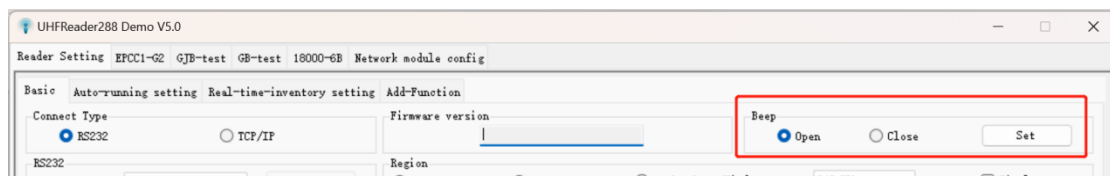

4.6 Temperature

Beep Open Close

Minfre: 840 MHz Single

Maxfre: 930 MHz

RS232/485 baud rate
57600bps

Set notification pulse output
 OUT1 OUT2 OUT3 OUT4

IN2 IN3 IN4



Working temperature monitoring
25° C

Measuring antenna ports Return Loss

Chapter 5. RFID Tag Read and Write Operations

- Place the RFID tag to be read or written within the device's reading range,
- Start the software, select the read or write operation, and follow the on-screen prompts.

Noted. Default password is '00000000'.

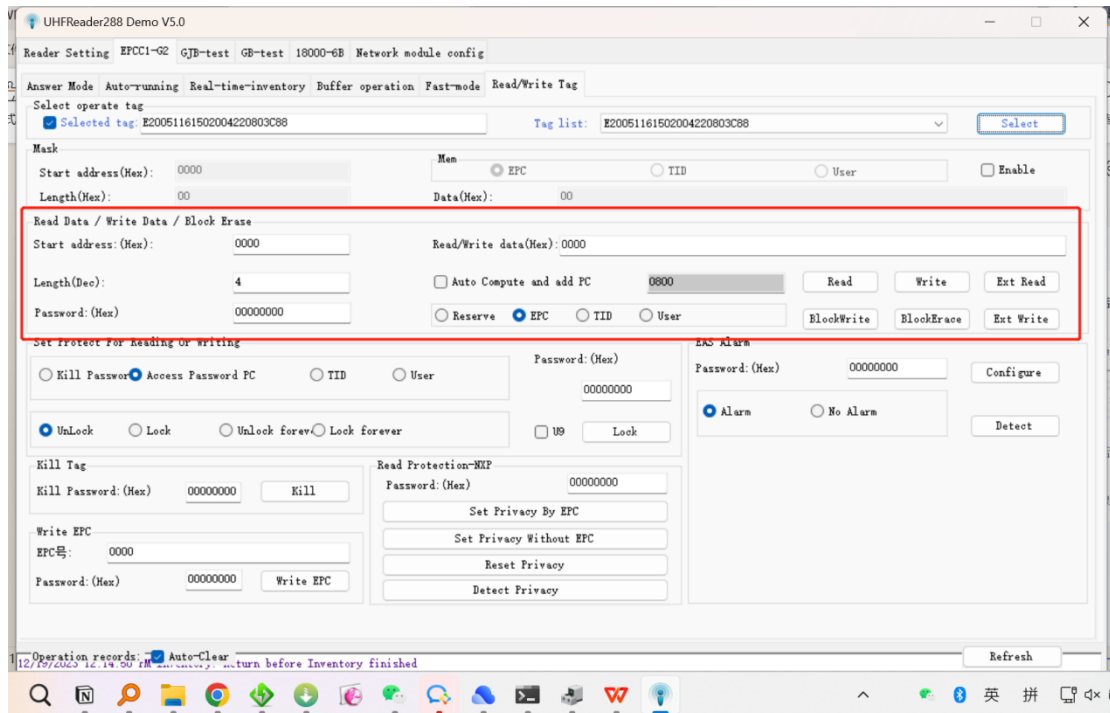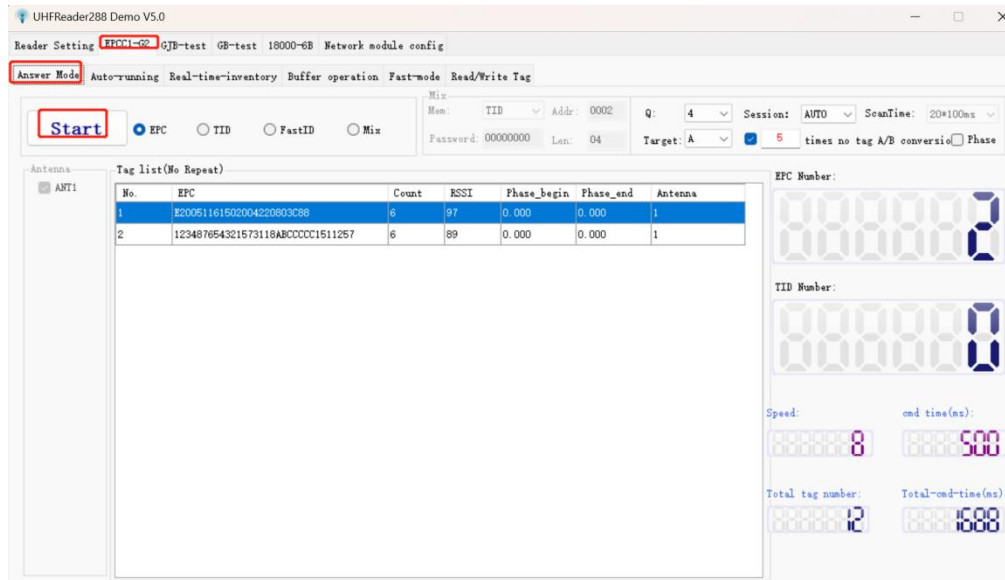

Chapter 6. RFID Tag Lock and Kill

Answer Mode	Auto-running	Real-time-inventory	Buffer operation	Fast-mode	Read/Write Tag
Select operate tag					Tag list:
<input checked="" type="checkbox"/> Selected tag: E20051161502004220803C88					E200511615020
Mask			Mem		
Start address(Hex):	0000		<input checked="" type="radio"/> EPC	<input type="radio"/> TID	
Length(Hex):	00		Data(Hex):	00	
Read Data / Write Data / Block Erase					
Start address: (Hex):	0000		Read/Write data(Hex):	0000	
Length(Dec):	4		<input type="checkbox"/> Auto Compute and add PC	0800	
Password: (Hex)	00000000		<input type="radio"/> Reserve	<input checked="" type="radio"/> EPC	<input type="radio"/> TID
Set Protect For Reading Or Writing					
<input type="radio"/> Kill Passwor <input checked="" type="radio"/> Access Password PC <input type="radio"/> TID <input type="radio"/> User				Password: (Hex)	
<input checked="" type="radio"/> UnLock <input type="radio"/> Lock <input type="radio"/> Unlock forev <input type="radio"/> Lock forever				<input type="checkbox"/> U9 <input type="button" value="Lock"/>	
Kill Tag			Read Protection-NXP		
Kill Password: (Hex)	00000000	<input type="button" value="Kill"/>	Password: (Hex)	00000000	
Write EPC			<input type="button" value="Set Privacy By EPC"/>		
EPC号:	0000		<input type="button" value="Set Privacy Without EPC"/>		
Password: (Hex)	00000000	<input type="button" value="Write EPC"/>	<input type="button" value="Reset Privacy"/>		
			<input type="button" value="Detect Privacy"/>		

Chapter 7. Environmental

- Position the FR2000 on a stable surface, ensuring good ventilation in the surrounding environment.

- Avoid use in humid, high-temperature, or extreme temperature conditions to prevent affecting device performance.

Environment	Operating Temp.	-20°C ~ +50°C
	Storage Temp.	-40 ~ +70°C
	Humidity	5%RH ~ 95%RH(No condensation)
	Sealing	IP54
	ESD	+/-15kv Air; +/-8kv contact

Chapter 8. Safety Precautions

When operating the desktop UHF reader (such as the FR2000) from Urovo Technology, it is essential to observe the following safety precautions to ensure a secure and efficient usage environment:

Electrical Safety:

Connect the UHF reader only to power sources that comply with the specified voltage and power requirements outlined in the user manual.

Avoid exposing the device to water or moisture to prevent electrical hazards.

Ventilation:

Ensure proper ventilation around the desktop UHF reader to prevent overheating. Avoid blocking ventilation openings to maintain optimal performance.

Handling and Placement:

Handle the UHF reader with care and avoid dropping it or subjecting it to physical impact.

Place the reader on a stable and flat surface to prevent accidental falls.

Cleaning:

Disconnect the UHF reader from the power source before cleaning.

Use a soft, dry cloth to clean the device. Avoid using liquid or abrasive cleaners.

RFID Tags:

Exercise caution when handling RFID tags to prevent damage.


Do not place metal objects or other interference sources near the RFID reader, as they may affect its performance.

Firmware and Software Updates:

Follow the manufacturer's guidelines for firmware and software updates to ensure the device's security and optimal functionality.

Chapter 9. Develop option

Please maintain continuous communication with technical personnel to obtain development materials.

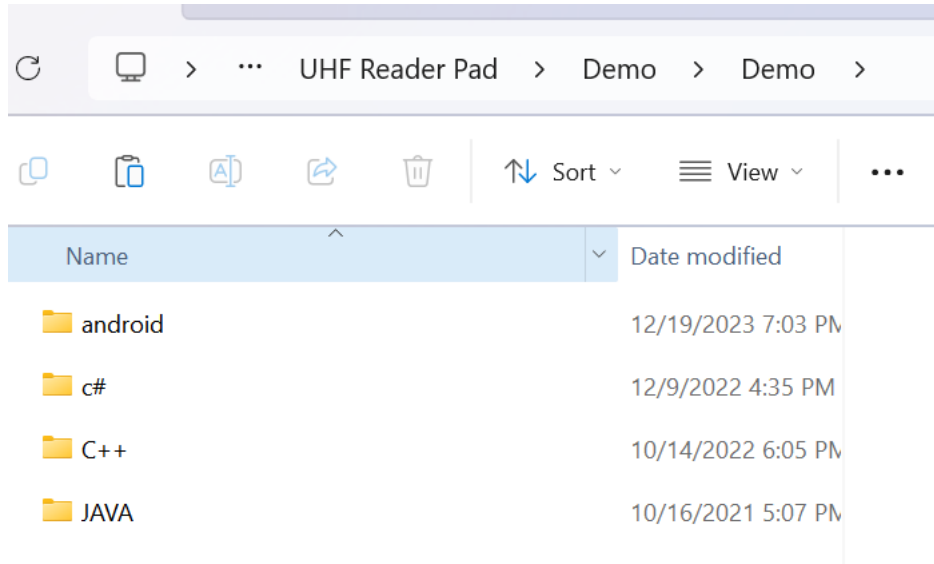

Chapter 10. Troubleshooting

- If you encounter issues during use, refer to the accompanying troubleshooting guide or contact the customer service team for assistance.

If you have any questions or need further support, feel free to contact our customer service team. Thank you for choosing the FR2000 Desktop RFID (UHF) Reader, and we wish you a pleasant user experience!

Will update...

Appendix 1

Specifications

Basic specifications	Model	UROVO FR2000	
	Dimensions	325mmx325mmx20mm	
	weight	1850g	
	RFID	Based on Impinj E710 design, fully support 18000-6C (EPC CLASS1 G2) protocol tags	
		840~960MHz frequency band (frequency customization optional)	
		FHSS or Fix Frequency transmission, support RSSI	
		RF output power up to 30dbm (adjustable)	
		Built-in antenna, typical reading effective distance < 50cm	
Power	Type-C USB 2.0 power supply (POE optional)		
Interfaces	Support Type-C USB2.0 interface (Bluetooth 5.0/RJ45 optional)		
Environment	Operating Temp.	-20°C ~ +50°C	
	Storage Temp.	-40 ~ +70°C	
	Humidity	5%RH ~ 95%RH(No condensation)	
	Sealing	IP54	
	ESD	+/-15kv Air; +/-8kv contact	

Power supply

Unless otherwise noted, the specifications shown are taken from TA=25 °C and VCC=+5V operating conditions

ITEM	SYMBOL	MIN	TYP	MAX
Power Supply	VCC	4.8V	5V	5.5V
Current Dissipation	IC			2.5A

Interfaces

NAME	ITEM	DESCRIPTION	REMARK
BT	Bluetooth LED	Bluetooth detected indication	BLUE
WORK	Operation LED	Tag detected indication	GREEN
PWR	Power LED	Power on indication	RED
USB INTERFACE	USB	Type-C USB2.0	
BUZZER	BUZZER	Power on indication	

According to different situations such as model and configuration, the power supply, communication

and indicator lights of the fuselage may be slightly adjusted, please refer to the actual situation.

Accessories

	Type
Standard Accessory	Type-C cable*1