

HONEYWELL GRANIT™ ULTRA ACCESSORIES GUIDE

Accessories Guide

Honeywell

TABLE OF CONTENTS

3	Stands, Holders, Holsters, Misc
4	Access Points, Batteries, Charge and Communication Bases, and Chargers
5	Cables
6	Heaters
6	Power Supplies for Charge/Comm Bases
6	Power Supplies For Quad Battery Charger
7	Power Supplies for Cabled Connections
7	AC Line Cords

STANDS, HOLDERS, HOLSTERS, MISC



HOLDER-010-U

Wall-Mount Cup

Holder Kit: Plastic bracket facilitates mounting of scanner to wall; two mounting screws included in kit.



HOLSTER-INDUSTRIAL

Granit Holster

Securely holds Granit Ultra and Granit XP scanners, leaving hands free to accomplish tasks.



STND-33F00-012-4

Flexible Presentation Stand

Stand: gray, 9" flexible rod, weighted base, Granit cradle.



TOOLBAL

Take-Up Reel/Tool Balancer

Suspension reel commonly used for scanner mounting/retention on vehicles and in fixed locations.



VMHOLDER2K

Vehicle mount holder

Vehicle Mount Cup: Contains vehicle mount Granit scanner cup with 1 in. dia. ball joint attachment. Recommended use with VMHOLDER3K or VMHOLDER4K (not included).



VMHOLDER3K

Vehicle mount holder

Vehicle mount kit: Contains adjustable arm with 1 in. dia. ball joints and circular mounting plate. Recommended use with VMHOLDER 2K cup (not included).



VMHOLDER4K

Vehicle mount holder

Vehicle mount kit: Contains adjustable arm with 1 in. dia. ball joints and square post clamp base for posts up to 3 in. wide and 2.5 in thick. Recommended use with VMHOLDER 2K cup (not included).



VMHOLDER5K

Vehicle mount holder

Vehicle Mounting Plate for CCB23, includes bracket, lanyard, cable tie and screws.



805-813-001

Vehicle mount holder

Vehicle mount kit: Contains RAM adjustable 5.5in arm with 1.5in C size dia. ball joints and circular mounting plate. Recommended use with VMHOLDER5K (not included)



2105IENDCAP

Battery end cap

Cordless Granit Ultra end cap (battery door) for 2105i models



199XILNYRDPLT

Lanyard plate

Replacement metal lanyard plate for connection to tool balancer. Compatible with Granit Ultra and Granit XP models. Pack of 1.



199XIORING

Corded IP65/67 O-Ring

O-ring for IP sealing with Granit Ultra and Granit XP scanner cables. Pack of 10.

STANDS, HOLDERS, HOLSTERS, MISC

Continued



CCB23ORING

Cordless IP65 O-Ring

O-ring for IP65 sealing with Granit Ultra base cables. Pack of 10.



PSORING

Cordless IP65 O-Ring

O-ring for IP65 sealing with Granit Ultra power adapter (5V3A) cables. Pack of 10.

ACCESS POINTS, BATTERIES, CHARGE AND COMMUNICATION BASES, AND CHARGERS



AP-100BT-07N

Bluetooth Access Point

Access point for Granit Ultra and XP scanners. Class 1 Bluetooth, 100m, up to 7 Granit Ultra scanners can be connected (cables sold separately).



AP-05-100BT-07N

Bluetooth Access Point

Access point for Granit Ultra, XP, and 1981i scanners. Class 1 Bluetooth, 100m, up to 7 Granit scanners can be connected (cables sold separately).



BAT-SCN11

Smart Battery Pack

Battery: Lithium-ion battery for Granit Ultra and Xenon Ultra cordless scanners.



CCB23-100BT-07N

Granit Ultra Charge/Communication Base

Granit Ultra Base: Charge and communication. Class 1 Bluetooth. 100m (300'), up to 7 scanners can be connected. Compatible with RS232/USB/KBW cables (sold separately).



MB4-BAT-SCN11

Quad Battery Charger

Quad Battery Charger - Kit includes (BAT-SCN11-CUP), Dock and Power Supply(12V3A,50121666-001), No Power Cord



BAT-SCN11-CUP

Cup for Quad Battery Charger

Cup for BAT-SCN11 battery charger (MB4-BAT-SCN11)

1. Indicates characters designating regional configuration

CABLES

CBL-020-300-C00	CBL-020-300-C00-01	CBL-020-300-C00-02
RS-232 Cable Cable: RS232 (5V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.	RS-232 Cable Cable, Industrial (for freezer temps): RS-232 (5V signals), black, DB9 Female, 3 m (9.8 ft), coiled, 5V external power with option for host power on pin 9, w/o ferrite.	RS-232 Cable Cable, Industrial (for freezer temps): RS-232 (5V signals), black, DB9 Female, 3 m (9.8 ft), coiled, 5V external power with option for host power on pin 9, with ferrite.
CBL-020-500-C00	CBL-020-350-S00	CBL-120-300-C00
RS-232 Cable Cable: RS232 (+5V signals); black, DB9 female, 5m (16 ft), coiled, external power with option for host power on pin 9, w/o ferrite.	RS-232 Cable Cable: RS-232 (5V signals), black, DB9 female, 3m (9.8'), straight, external power with option for host power on pin 9, w/o ferrite.	RS-232 Cable Cable: RS-232 (+/-12V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.
CBL-220-300-C00	CBL-320-300-C00	CBL-500-300-C00
RS-232 Cable Cable: RS-232 (5V signals), black, DB9 Male, 3m (9.8'), coiled, external power with option for host power on pin 9, Wincor Beetle.	RS-232 Cable Cable: RS-232 (+/- 12V signals), black, DB9 Male, 3m (9.8'), coiled, external power with option for host power on pin 9, w/o ferrite.	USB Cable Cable: USB, black, Type A, 3m (9.8'), coiled, 5V host power, w/o ferrite.
CBL-500-300-C00-07	CBL-500-300-S00	CBL-500-300-S00-01
USB Cable Cable: Industrial (for freezer environments)USB, black, Type A, 3m (9.8'), straight, 5V host power.	USB Cable Cable: USB, black, Type A, 3m (9.8'), straight, 5V host power, w/o ferrite.	USB Cable Cable, Industrial (for freezer environments) USB, black, Type A, 3m (9.8'), straight, 5V host power, w/o ferrite.
CBL-501-300-S00	CBL-503-300-C00	CBL-503-300-S00
USB Cable Cable: USB Granit scanner cable, compatible with USB D9 connectors on VM series docks, w/o ferrite.	USB Cable Cable: USB, black, 12V locking, 3m (9.8'), coiled, 5V host power, w/o ferrite.	USB Cable Cable: USB, black, 12V locking, 3m (9.8'), straight, 5V host power, w/o ferrite.
CBL-503-500-C00	CBL-720-300-C00	CBL-720-370-C00
USB Cable Cable, USB, black, 12V locking, 5m (16.4'), coiled, 5V host power, w/o ferrite.	KBW Cable Cable: KBW, black, PS2, 3m (9.8'), coiled, 5V external power with options for host power, w/o ferrite.	PS-2 Cable Cable: USB, black, PS-2 Keyboard Wedge, 3.7 meter (11.3 ft) Coiled, 5V, w/o ferrite.
CBL-800-300-C00	CBL-801-370-C00	
USB C Cable Cable: USB C, 3m (9.8'), coiled, 5V host power, w/o ferrite.	RS-232 Talkman Cable Cable, RS-232 (5V signals), black, Granit to Vocollect Talkman, 3.7m (12 ft), coiled, host 5V power only, w/o ferrite.	

HEATERS



520-24-H3

Scanner Heater with Cable Retractor

24V heater for Granit scanners in freezer environments.




520-36/48-H3

Scanner Heater with Cable Retractor

36-48V heater for Granit scanners in freezer environments.


POWER SUPPLIES FOR CHARGE/COMM BASES



PS-05-3000-W-U

Granit Ultra CCB Power Supply

Granit Ultra Power Supply for charge and communication base (CCB23), 5VDC 3.0A, 100-240VAC @50-60HZ, . Includes plug adapters for type A, C, G, and I.

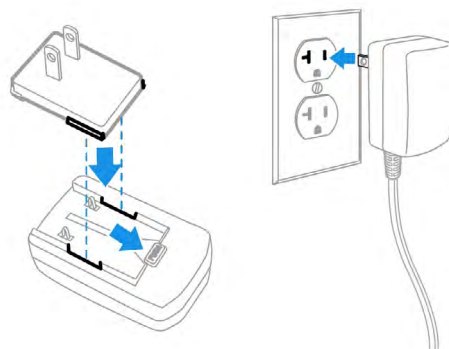

POWER SUPPLIES FOR QUAD BATTERY CHARGER

50121666-001

Desktop Power Supply

12V3A(36W) power supply for quad battery charger. Country-specific line cord must be ordered separately.

POWER SUPPLIES FOR CABLED CONNECTIONS

46-00525-6

Power Supply – NA Plug

Power Supply: Type A plug (NA), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

46-00528


Power Supply – ANZ Plug

Power Supply: Type I plug (ANZ, Argentina, China), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

46-00526-6

Power Supply – EU Plug

Power Supply: Type C plug (EU), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

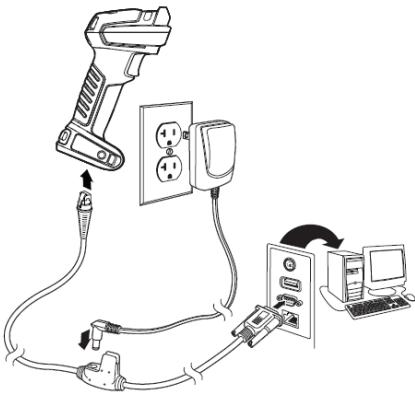

AC LINE CORDS

50117501-001

Power Cord (Australia)

Power cord, Australia, 2.5 m (8.2 ft).

130063

Power Cord (U.S.)

Power cord, United States, straight (US type B grounded 3 prongs, C13), 2.5m (8.2ft)

77900507E

Power Cord (UK)

Power cord, United Kingdom, IEC320-C13, 2.5 m (8.2 ft).

77900508E

Power Cord (EU)

Power cord, Europe, IEC320-C13, 2.5 m (8.2 ft).

For more information

automation.honeywell.com

Honeywell Industrial Automation

855 South Mint Street
Charlotte, NC 28202
800-582-4263
www.honeywell.com